

CI/SfB (74.1) | g3 |
Date January 2006

Supersedes all previous issues

2.1.1

Colonial 1.6/0.8 gpf (6/3 I) Water Saving Dual Flush High Efficiency Toilet (HET)

Two Piece Ultra Low flush (ULF) Vitreous China Washdown Toilet





Colonial

1.6/0.8 gpf (6/3 l) Water Saving Dual Flush High Efficiency Toilet (HET) Two Piece Ultra Low flush (ULF) Vitreous China Washdown Toilet



An elegant, early 1900's, period piece concept close coupled **1.6/0.8 gpf (6/3 I)** dual flush toilet featuring unique two button activation providing substantial water saving compared to standard toilets and adjustable rough in and smooth rounded contours for easy cleaning. The closet bowl has been designed with rough in of **10" (255mm)** to **12" (305mm)** provided by plastic offset outlet connector option. The overall length from the finished wall is 293/4" (756mm). The tank incorporates the Duo-Flo mechanism which has been specially developed with the Colonial 270 toilet to ensure optimum reliable flushing performance. Due to the substantial water saving benefits achieved by the 1.6/0.8 gpf (6/3 I) dual flush system the toilet is suitable for multi purpose applications where **water conservation** is important.

Closet Bowl: Colonial 1.6/0.8 gpf (6/3 l) full flush washdown closet bowl with open flushing rim.

Outlet: Floor mounted suitable for connection to waste outlet with offset plastic outlet connector

for 10" (255mm) and 12" (305mm) rough in.

Tanks: Colonial Tank – has a free fitting lid and is suitable for domestic and light commercial

applications.

need for wall fixing.

Weight: 78 lbs (35 kg).

Fixing:

Water Control Standard Bottom Entry Tank – available as left hand inlet and incorporates a super

Valve: quiet water control assembly. Internal overflow only.

The tank is fixed directly to the closet bowl with a robust base fixing system without the

Seats: The following Caroma seats are recommended: Colonial wooden seat or Caravelle


2000.

Colors: White and biscuit only.

Dimensions: All dimensions are in inches and millimetres and are subject to normal manufacturing

variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without

notice

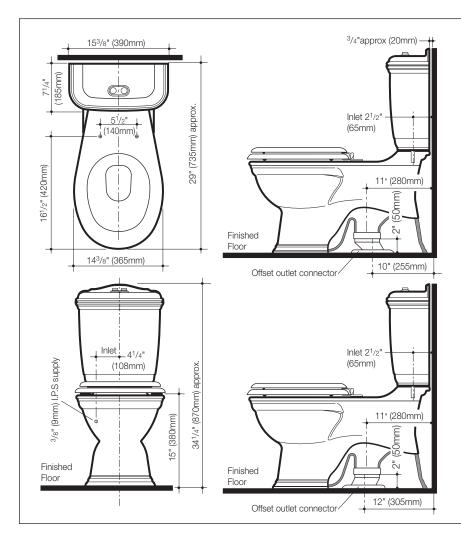

Colonial:		Code No.
Tank	LH inlet	605310
Bowl		625070
	HIGH EFFICIENCY TOILET	
	HIGH EFFICIENCY TOILET	



Note: All height dimensions to underside of closet bowl, make allowance for bedding.

Screw fixing: The closet bowl should be bedded with an approved silicon caulking and fixed with corrosion resistant screws and closet bowl guard washers. Use Caroma screw fixing kit. Code No. 601150.